

1 Schematic cross section and top view of typical Si-based PV module and different loss and gain mechanisms:

- 1 Reflection loss air/glass | 2 Absorption loss glass | 3 Reflection loss glass/encap | 4 Absorption loss encap. | 5 Coupling gain encap./cell | 6 Reflection at the inside of the glass | 7 Losses on module border and spacing | 8 Redirection gain from inactive area | 9 Shading losses of the ribbon | 10 light redirection gain from ribbon | 11 Ohmic losses in interconnection

CELL-TO-MODULE (CTM) CHARACTERIZATION AND OPTIMIZATION OF PV MODULES

CTM is defined as ratio of module power over sum of cell powers. Today's solar modules have the capability to exceed the power of the cells, i.e. achieve a $CTM > 100\%$. This is possible with optical gains exceeding optical and electrical losses. A proper choice and mix of materials and technologies is necessary to achieve this ambitious goal.

Fraunhofer CSP can quantify potential gains and reducing losses in your modules or with your materials and technologies. This allows you to estimate implications on cost, value and potential margin.

Fraunhofer Center for Silicon Photovoltaics CSP

Otto-Eissfeldt-Strasse 12
06120 Halle (Saale) | Germany

Contact

Prof. Dr. Jens Schneider
Phone +49 345 5589 5500
jens.schneider@csp.fraunhofer.de


www.csp.fraunhofer.de

Competences and Utilities


- Simulation
 - Optical
 - Electrical
- Updated measurement tools
 - Electroluminescence
 - Flasher
 - Optical spectroscopy
 - Loss analysis tool
- Fully automated fabrication line to produce prototype modules etc..)

Approach


- Electrical and optical characterization of each component of PV modules
- Fabrication of full scale PV modules with automated equipment to evaluate results
- Measurement and evaluation of PV modules with optimized and adapted components
- Novel module designs to achieve higher CTM ratios
- Simulation by means of analytical models and SPICE

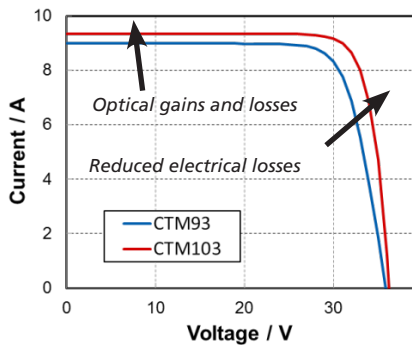

2 Measured IV curves of optimized half-cell vs full-cell module.

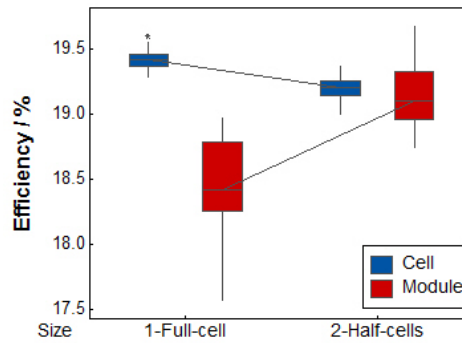

3 Measured efficiency of half-cells and full-cell cells and modules

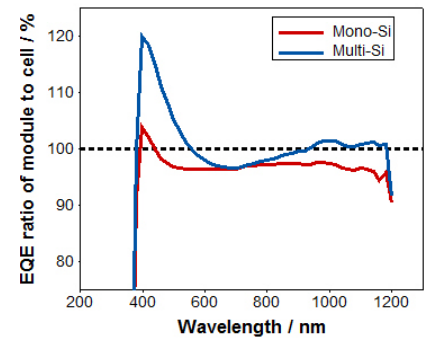

4 Spectral resolved EQE ratios of module to cell with different cell technologies.

Optimizing Optics

Reducing reflection losses at all module material interfaces and absorption losses inside the materials typically increases your module power (see Fig. 7). It is important to understand that optimization of individual components does interact with other components. Spectral response of cells and module materials must be adapted to one another (see Fig. 5).

Optical gains from high reflection backsheets might require optimization of your cell gaps.

Bifacial modules require their very own optimization of optical properties.

Shading from your cell connection tabs interacts with your metallization geometry but also your electrical losses (see Fig. 2).

Reducing Electrical Losses


Electrical losses occur predominately in cell connector tabs. Increasing the width of the tabs reduced the electrical losses but increases optical shading losses at the same time. Proper optimization of your tab width is a challenge between STC power, energy yield at the field of application of your modules and module and cell layout. More busbars allow for narrower individual tabs. Half cells decrease electrical losses even further (see Fig. 6). More than 0.5% abs. per module can be gained with half cells (see Fig. 3). Half cell modules offer shading tolerance and are especially suitable for desert applications and bifacial modules. But mechanical properties of cell cutting process must be optimized to avoid cell breakage in production and in the field.

Understanding CTM


CTM is determined on standard and minimodule size by determining cell and module power. LED based flashers allow for quick spectral response analysis on cell and module level (see Fig. 4).

Spatially resolved characterization methods like LBIC and EL are used to quantify losses of individual components.


Spectral measurements of optical properties of all components together with optical simulations, both analytic and numerical allow us to optimize your bill of materials. Electrical simulations with SPICE reveal the potential of electrical improvements and allow for optimization of your module layout, cell size and interconnection tabs.

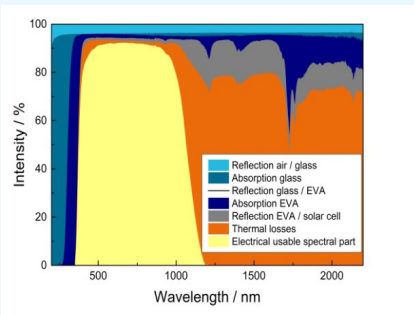

5 Spectral resolved losses of a one-cell mini-module.

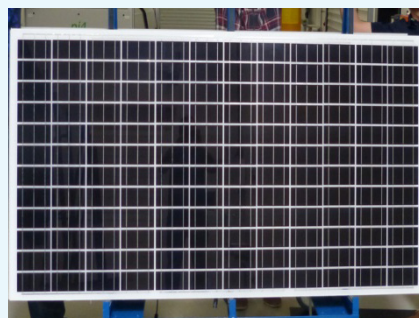

6 Half-cell module layout.



7 Relative power loss on top stack for optimized and standard modules.